

DMP 331P



Industrial Pressure Transmitter

Process Connections with
Flush Welded Stainless Steel
Diaphragm

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 % FSO

Nominal pressure

from 0 ... 100 mbar up to 0 ... 40 bar

Output signals

2-wire: 4 ... 20 mA / 3-wire: 0 ... 10 V
others on request

Special characteristics

- ▶ hygienic version
- ▶ diaphragm with low surface roughness
- ▶ CIP / SIP cleaning up to 150 °C
- ▶ vacuum resistant

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe
for gases and dust
- ▶ SIL 2 version
according to IEC 61508 / IEC 61511
- ▶ diaphragm in Hastelloy® or Tantalum
- ▶ cooling element for media temperatures up to 300 °C

The pressure transmitter DMP 331P was designed for use in the food / beverage and pharmaceutical industry. The compact design with hygienic versions makes it possible to achieve an outstanding performance in terms of accuracy, temperature behaviour and long term stability.

The modular construction concept allows a combination of various process connections with different filling fluids and a cooling element. Several electrical connections complete the profile of DMP 331P.

Preferred areas of use are



Food and beverage



Pharmaceutical industry

Material and test certificates

- ▶ inspection certificate 3.1
according to EN 10204
- ▶ test report 2.2
according to EN 10204



TYPE EL - CLASS I
AUGUST 2012

DMP 331P

Industrial Pressure Transmitter

Technical Data

Input pressure range ¹								
Nominal pressure gauge [bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6
Nominal pressure abs. [bar]	-	-	-	-	0.40	0.60	1	1.6
Overpressure [bar]	5	0.5	1	1	2	5	5	10
Burst pressure ≥ [bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15
Nominal pressure gauge / abs. [bar]	2.5	4	6	10	16	25	40	
Overpressure [bar]	10	20	40	40	80	80	105	
Burst pressure ≥ [bar]	15	25	50	50	120	120	210	
Vacuum resistance	$p_N > 1 \text{ bar}$: unlimited vacuum resistance $p_N \leq 1 \text{ bar}$: on request							

¹ consider the pressure resistance of fitting and clamps

Output signal / Supply								
Standard	2-wire:	4 ... 20 mA	/	$V_S = 8 \dots 32 \text{ V}_{\text{DC}}$	SIL-version:	$V_S = 14 \dots 28 \text{ V}_{\text{DC}}$		
Option IS-version	2-wire:	4 ... 20 mA	/	$V_S = 10 \dots 28 \text{ V}_{\text{DC}}$	SIL-version:	$V_S = 14 \dots 28 \text{ V}_{\text{DC}}$		
Options 3-wire	3-wire:	0 ... 20 mA	/	$V_S = 14 \dots 30 \text{ V}_{\text{DC}}$				
		0 ... 10 V	/	$V_S = 14 \dots 30 \text{ V}_{\text{DC}}$				

Performance

Accuracy ²	standard: nominal pressure < 0.4 bar: $\leq \pm 0.5\% \text{ FSO}$ nominal pressure ≥ 0.4 bar: $\leq \pm 0.35\% \text{ FSO}$ option: nominal pressure ≥ 0.4 bar: $\leq \pm 0.25\% \text{ FSO}$							
Permissible load	current 2-wire: $R_{\text{max}} = [(V_S - V_{S \text{ min}}) / 0.02 \text{ A}] \Omega$ current 3-wire: $R_{\text{max}} = 500 \Omega$ voltage 3-wire: $R_{\text{min}} = 10 \text{ k}\Omega$							
Influence effects	supply: 0.05 % FSO / 10 V		load: 0.05 % FSO / $k\Omega$					
Long term stability	$\leq \pm 0.1\% \text{ FSO} / \text{year at reference conditions}$							
Response time	2-wire: < 10 msec		3-wire: ≤ 3 msec					

² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span) ³ / Permissible temperatures

Nominal pressure p_N [bar]	-1 ... 0	< 0.40	≥ 0.40
Tolerance band [% FSO]	$\leq \pm 0.75$	$\leq \pm 1.5$	$\leq \pm 0.75$
in compensated range [°C]	-20 ... 85	0 ... 50	-20 ... 85
Permissible temperatures ⁴	medium: electronics / environment: storage:	-40 ... 125 °C for filling fluid silicone oil -10 ... 125 °C for filling fluid food compatible oil -40 ... 85 °C -40 ... 100 °C	
Permissible temperature medium for cooling element 300°C	filling fluid silicone oil filling fluid food compatible oil	overpressure: -40 ... 300 °C overpressure: -10 ... 250 °C	vacuum: -40 ... 150 °C ⁵ vacuum: -10 ... 150 °C ⁵

³ an optional cooling element can influence thermal effects for offset and span depending on installation position and filling conditions.

⁴ max. temperature of the medium for nominal pressure gauge > 0 bar: 150 °C for 60 minutes with a max. environmental temperature of 50 °C

⁵ also for $p_{abs} \leq 1 \text{ bar}$

Electrical protection

Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability

Vibration according to DIN EN 60068-2-6	G 1/2": 20 g RMS (25 ... 2000 Hz)	others: 10 g RMS (25 ... 2000 Hz)
Shock according to DIN EN 60068-2-27	G 1/2": 500 g / 1 msec	others: 100 g / 1 msec

Filling fluids

Standard	silicone oil
Options	food compatible oil according to 21CFR178.3570 (Mobil SHC Cibus 32; Category Code: H1; NSF Registration No.: 141500) others on request











Materials

Pressure port	stainless steel 1.4435 (316 L)	others on request
Housing	stainless steel 1.4404 (316 L)	
Option compact field housing	stainless steel 1.4301 (304); cable gland M12x1.5, brass, nickel plated (clamping range 2 ... 8 mm)	
Seals	standard: FKM (recommended for medium temperatures ≤ 200 °C) option: FFKM (recommended for medium temperatures > 200 °C)	others on request
	Clamp, dairy pipe, Varivent®. without	
Diaphragm	standard: stainless steel 1.4435 (316 L) option: Hastelloy® C-276 (2.4819)	Tantalum on request
Media wetted parts	pressure port, seal, diaphragm	

DMP 331P


Industrial Pressure Transmitter

Technical Data

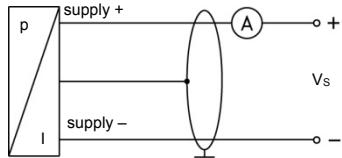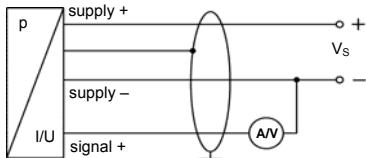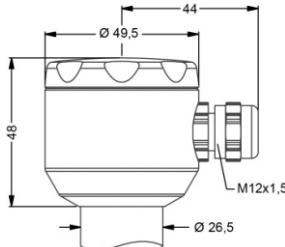Explosion protection (only for 4 ... 20 mA / 2-wire)					
Approvals DX19-DMP 331P	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da				
Safety technical maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i \approx 0 \text{ nF}$, $L_i \approx 0 \mu\text{H}$, the supply connections have an inner capacity of max. 27 nF to the housing				
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -40/-20 ... 70 °C				
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$				
Miscellaneous					
Option SIL2 version ⁶	according to IEC 61508 / IEC 61511				
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA				
Weight	min. 200 g (depending on process connection)				
Installation position	any (standard calibration in a vertical position with the pressure port connection down; differing installation position for $p_N \leq 2 \text{ bar}$ have to be specified in the order)				
Operational life	100 million load cycles				
CE-conformity	EMC Directive: 2014/30/EU				
ATEX Directive	2014/34/EU				
⁶ only for 4 ... 20 mA / 2-wire					
Wiring diagrams					
2-wire-system (current)					
3-wire-system (current / voltage)					
Pin configuration					
Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	compact field housing	cable colours (IEC 60757)
Supply +	1	3	1	IN +	WH (white)
Supply -	2	4	2	IN -	BN (brown)
Signal + (only 3-wire)	3	1	3	OUT+	GN (green)
Shield	ground pin \ominus	5	4	\ominus	GNYE (green-yellow)
Electrical connections (dimensions in mm)					
standard		options	 		
ISO 4400 (IP 65)		Binder series 723, 5-pin (IP 67)		M12x1, 4-pin (IP 67)	
compact field housing (IP 67)		cable outlet with PVC cable (IP 67) ⁷		cable outlet, cable with ventilation tube (IP 68) ⁸	
⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request					
⁷ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)					
⁸ different cable types and lengths available, permissible temperature depends on kind of cable					


Mechanical connection (dimension in mm)

standard

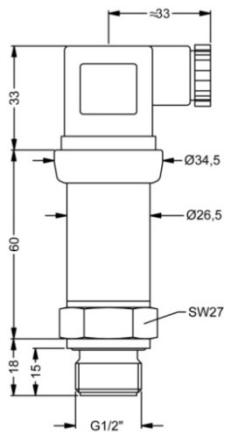


G1/2" flush DIN 3852⁹

options

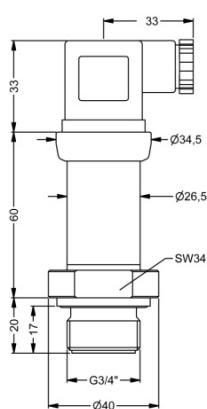


G 3/4" flush DIN 3852
with ISO 4400

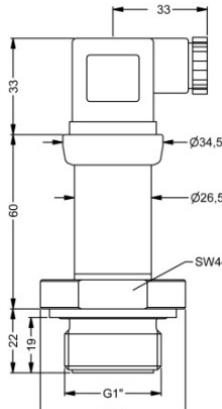


G1" flush DIN 3852
with ISO 4400


options

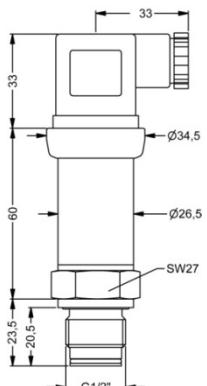


G1/2" flush
with radial o-ring⁹

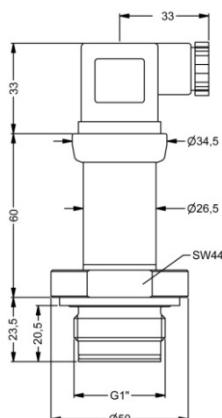


G1" flush
with radial o-ring (pN ≤ 2 bar)

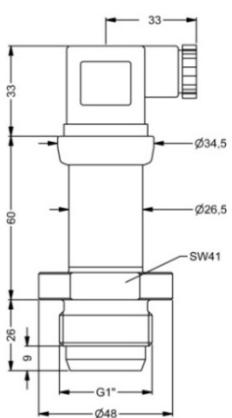


G1" cone
with ISO 4400

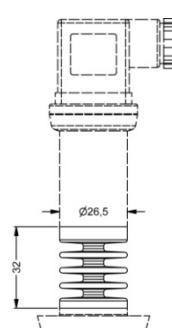


cooling element 300 °C

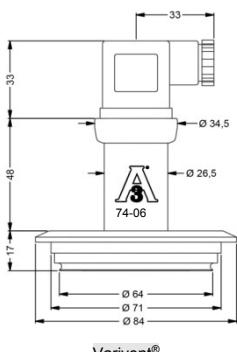

Varivent®
pN ≤ 25 bar

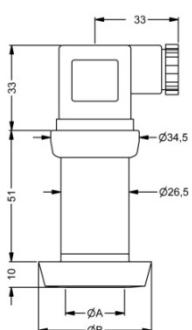

dairy pipe (DIN 11851)
with ISO 4400

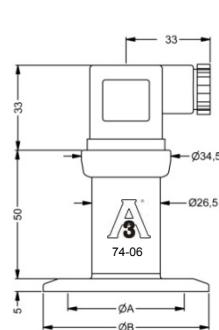

Clamp (DIN 32676)
with ISO 4400

dimension in mm			
size	DN 25	DN 40	DN 50
A	23	32	45
B	44	56	68.5
p _N [bar]	≥ 0.25 ≤ 40	≥ 0.25 ≤ 40	≥ 0.25 ≤ 25

dimension in mm				
size	3/4"	DN 25	DN 32	DN 50
A	14	23	32	45
B	25	50.5	50.5	64
p _N [bar]	≥ 4 ≤ 8	≥ 0.25 ≤ 16	≤ 16	≤ 16

* higher pressure ranges on request

- ⇒ SIL- and SIL-Ex version: total length increases by 26.5 mm!
- ⇒ metric threads and other versions on request

⁹ possible only for p_N ≥ 1 bar

Ordering code DMP 331P

¹ absolute pressure possible from 0.4 bar

² standard: 3 m PVC cable without ventilation tube (permissible temperature: -5...70°C), others on request.

² standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C), optional
³ code TR2 – PVC cable, cable with ventilation tube, available in different types and lengths

³ code TR0 = PVC cable, cable with ventilation tube available in different types and lengths
⁴ The maximum length of the cable depends on the type of cable used. In the field, it is recommended to use the shortest cable possible.

⁴ The cup nut has to be mounted by production of pre-

The cup nut has to be order

⁵ possible only for $p_N \geq 1$ bar

⁶ possible only for $P_N \leq 2$ bar

24.24.0000